


# “Dimmer Box” Power LED Dimmer Converter

## Dimmable converters for High Brightness LEDs

- Independent converter - IP40 - Insulation class II
- Light control - on, off and dimming - by one or more push-buttons
- Suitable for 1W High Brightness LEDs - Output in constant current 350mA  $\pm$ 10% - Series connection - Standard software cycle: 30 seconds (on request, 60 seconds)
- Self-resetting protection against over temperatures, open circuits and output's short circuits.
- Input voltage: 120V/AC DBOX31 - Steady output
- Parallel connection for max. 25 "DBox" controlled by the same (or more) push-buttons

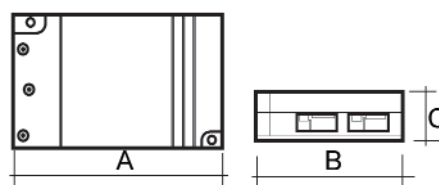

Model	LED		Output		Dimensions			oz.	Part Number
	min	max	I max	V max	A	B	C		
DBox31	3	24	350mA	40V	5.8" x 3.0" x 1.0"			1.8 oz.	QT-DBOX3100B

