


“Power Box” Power LED Converter

Converters for High Brightness LEDs

- Independent converter - IP40 - Insulation class II
- Suitable for supplying High Brightness 1W and 3W LEDs
- Series connection with three independent outputs
- Output in steady current: 3 x 350mA, ±10%
- Self-resetting protection against over temperatures, open circuits and against output short circuits.
- Input voltage: 120V/AC PBOX31 - Steady output

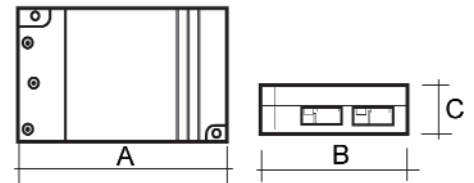

Model	LED		Output		Dimensions			Part Number	
	min	max	I max	V max	A	B	C		
PBox 31	3	24	3 x 350mA	40V	5.8" x 3" x 1"			5.6 oz.	QT-LVL0000N

