


# “PD” Power Design, Power LED Converter

## Converters for High Brightness LEDs

- Independent converter - IP40 - Insulation class II
- Suitable for supplying High Brightness 1W and 3W LEDs Series connection
- Output in steady current: 350mA - 700mA,  $\pm 10\%$
- Self-resetting protection against over temperatures, open circuits and output short circuits.
- Voltage: 120V/AC - Steady output

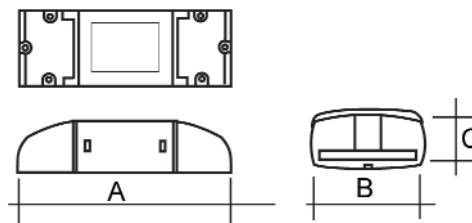

Model	LED			Output		Dimensions			oz.	Part Number
	min	max	max*	I max	V max	A	B	C		
PD 312	3	12	9	350mA	48V	5.4" x 1.6" x 1.1"			0.7 oz.	QT-PD312000B
PD 309	3	9	7	700mA	38V	5.4" x 1.6" x 1.1"			0.7 oz.	QT-PD309000B

