


“PLR” Power LED Round Converter

Converters for High Brightness LEDs

- Built-in converter - IP40 - Insulation class II
- Suitable for supplying High Brightness LEDs 1W /3W - Connection in series
- Output in steady current: 350mA, ±10%
- Self-resetting protection against over temperatures, against open circuit and against output short circuits.
- Input voltage: 120V/AC - Steady output

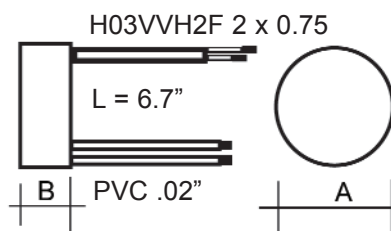

Model	LED		Output		Dimensions		oz.	Part Number
	min	max	I max	V max	A	B		
PLR 106	1	6	350mA	24V	2.0" x 0.8"		1.8 oz.	QT-PLR1061WB
PLR 110	1	9	350mA	48V	2.0" x 0.8"		1.8 oz.	QT-PLR1011WB

