


“U115-DC” Power LED Spot

High Brightness LED application - 24V - 13,5W

- Input: 22V/DC - 24V/DC Therewith supplied converter, type LVY, 700mA
- Suitable for being built in standard Ø4.4” AR111 downlights
- Supplied with 9.8” + 9.8” FEP leads, red (+) black (-)with miniAMP connector
- Different lens degrees available: narrow, medium and wide beam
- White LED color standard. Other LED colors available on request.

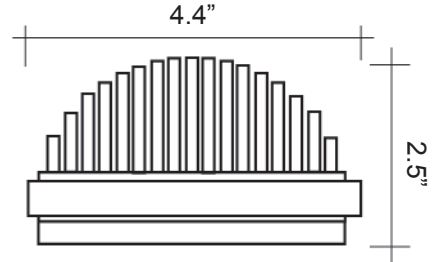

| Model | W Equivalent Power | Lumen Type | Lux @1m (cd) | | | Flat | V (typ.) | W (typ.) | Part Number |
|----------|--------------------|------------|--------------|--------|------|------|----------|----------|--------------|
| | | | Narrow | Medium | Wide | | | | |
| U115P DC | 39 | 400 | 2700 | 1000 | 750 | - | 12V | 13.5W | QT-U115PDCXX |
| U115T DC | 49 | 640 | 4370 | 1750 | 1300 | - | 12V | 13.5W | QT-U115TDCXX |
| U115U DC | 61 | 800 | 5200 | 2100 | 1500 | - | 12V | 13.5W | QT-U115UDCXX |

12VDC - 24VDC

9.8” + 9.8” FEP ZCB050F

Spot ring AR111 included, please specify color

1 2 3 4

Lens

N - Narrow Diffused
M - Medium Diffused
W - Wide Diffused
F - Wide Flat Precision
R - Mini Narrow Diffused
O - Mini Medium Diffused
S - no lens

please specify LED color

White - B ○
 Warm White - W ●
 Red - R ●
 Green - V ●
 Amber - A ●
 Blue - C ●

9.8” FEP CB050F

9.8” FEP CB025F