


“LIN6-DC” Power LED Spot

High Brightness LED strip line - 24V - 7.2W

- Input: 22V/DC - 24V/DC Therewith supplied converter, type LVX, 350mA
- Supplied with 9.8” + 9.8” FEP leads, red (+) black (-) with miniAMP connector
- Three different versions available: narrow beam, medium beam and without optic
- White LED color standard. Other LED colors available on request.

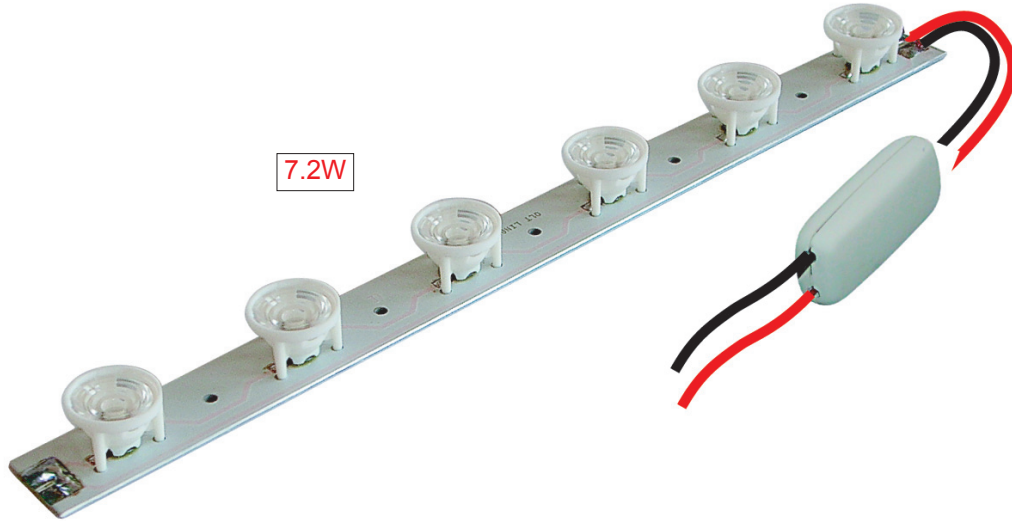

Model	W Equivalent Power	Lumen Type	Lux @1m (cd)				V (typ.)	W (typ.)	Part Number
			Narrow	Medium	Wide	NoLens			
LINE 6 DC	23	300	1400	750	500	17	12V / 24V	8.3W	QT-LINE06 XDCX
LINE T DC	36	480	1960	1050	700	25	12V / 24V	7.3W	QT-LINE0T XDCX
LINE U DC	46	600	2800	1500	1000	28	12V / 24V	7.3W	QT-LINE0U XDCX

Lens

- N - Narrow Diffused
- M - Medium Diffused
- W - Wide Diffused
- F - Wide Flat Precision
- R - Mini Narrow Diffused
- O - Mini Medium Diffused
- S - no lens

please specify LED color

- White - B ○
- Warm White - W ●
- Red - R ●
- Green - V ●
- Amber - A ●
- Blue - C ●

