


“RGB3” Power LED RGB Controller

Converters for High Brightness LEDs in "RGB" systems

- Built-in controller device - IP20 - Insulation class II
- Light control (on, off and dimming) by one push-button
- Suitable for 3 x 1W High Brightness LEDs (spots TRIOColor / Ambient) - Output in constant current 350mA, $\pm 10\%$ - Series connection - Standard software cycle: 17 seconds (on request, 30 or 60 seconds)
- Connection with fast terminal blocks
- Input voltage: by 5V/DC - 6V/DC 1,1A battery or by PLP502 converter.

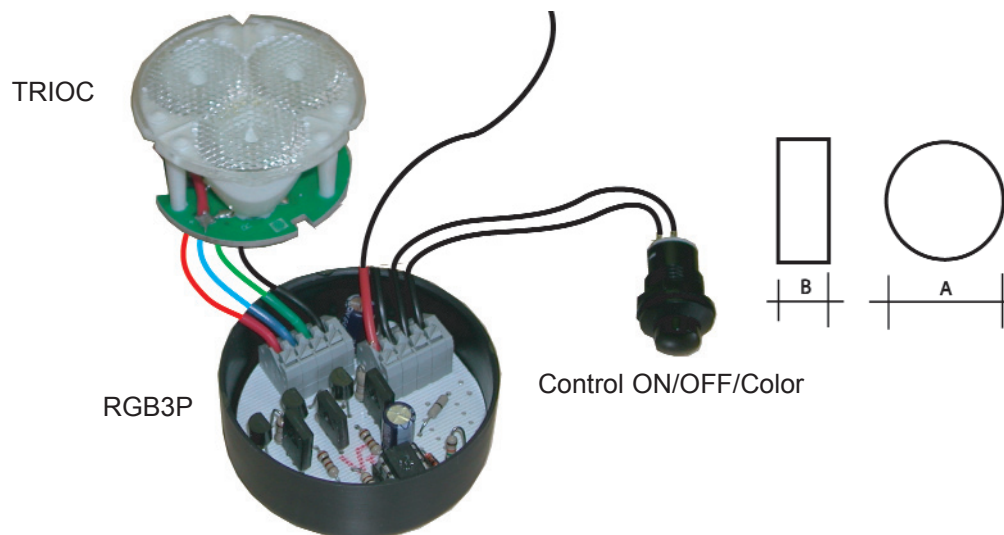

Model	LED min max	Output I max V max	Dimensions A x B	oz.	Part Number
RGB3P	3 3	350mA 6V DC	2.0" x 0.8"	1.8 oz.	QT-RGB3P000N

