
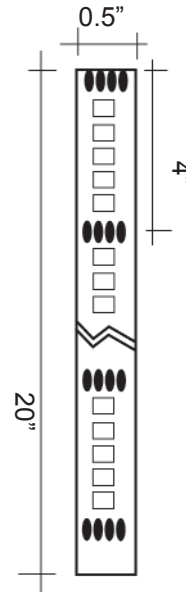


# “STRIP & Custom” LED Strip Custom Designed LED Applications

## Modular 24V RGB Stripe Lines

- 4” stripe modules (STRIP25) - Terminals to be soldered
- Connection in series mode - On request, cabling for 10” M/F
- Max. consumption: 300mA / 600mA for every 19.5” stripe and 600mA for 5LED module (4”)
- Luminous flux: 2 lm every LED (white color), 50lm every stripe

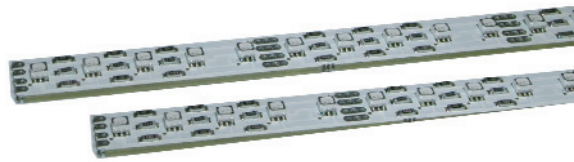

Model	Output / Input	Dimensions			oz.	Part Number
		A	B	C		
STRIP 25	24V DC 300mA	19.7"	0.5"	0.2"	1.8 oz.	QT-STRIP2500
STRIP 50	24V DC 600mA	19.7"	0.5"	0.2"	1.8 oz.	QT-STRIP5000

ETI's Technical and Project Department is at the customers' complete disposal for the realization of LED applications.

