


“TRIOC-DC” RGB Power LED Spot

High Brightness LED spot - 12V - 24V - 3.6W - 140 lm

·Input: 12V/DC 24V/DC PWM for RGB

(converter included: type 3 x LVX, 350mA)

- Suitable for being built in standard Ø 2” MR16 downlights
- Supplied with 10” and 20” FEP leads and connector type CB075C.
- Lens degrees available: narrow, medium and wide beam

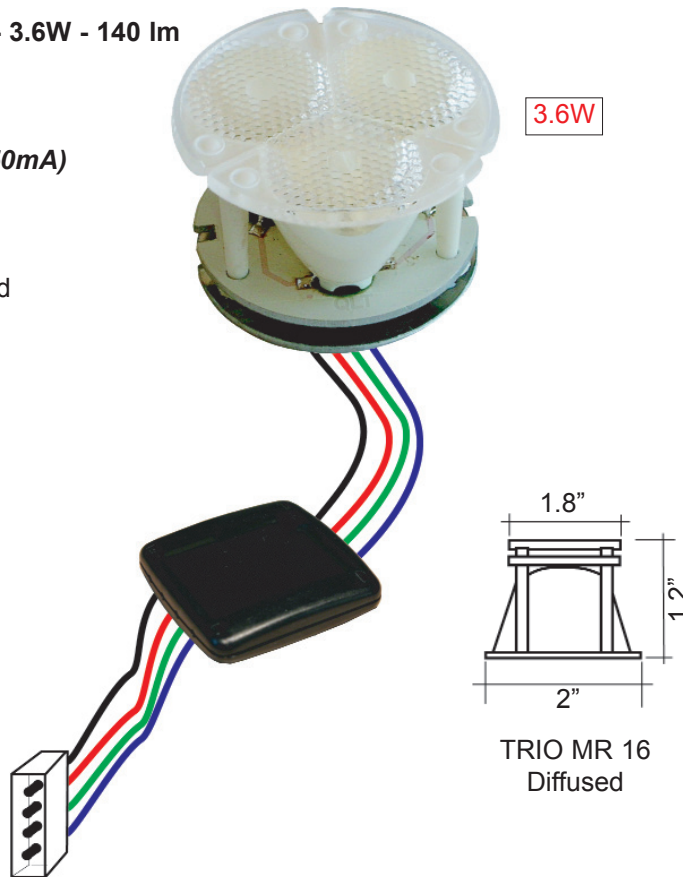

TRIO MR 16
Diffused

Model	W Equivalent Power	Lumen Type	Lux @1m (cd)				V (typ.)	W (typ.)	Part Number
			Narrow	Medium	Wide	No Lens			
TRIOC DC	5	140	-	400	140	25	12V / 24V	3.6W	QT-TRIOCDGX0

